




GeoClips[®] (U-Bend Pipe Separators) Installation Instructions

GHP Systems, Inc.
1000 32nd Ave
Brookings, SD 57006

(605) 697-7869 tel
(605) 697-9118 fax
888-447-7757 toll-free
www.ghpsystems.com

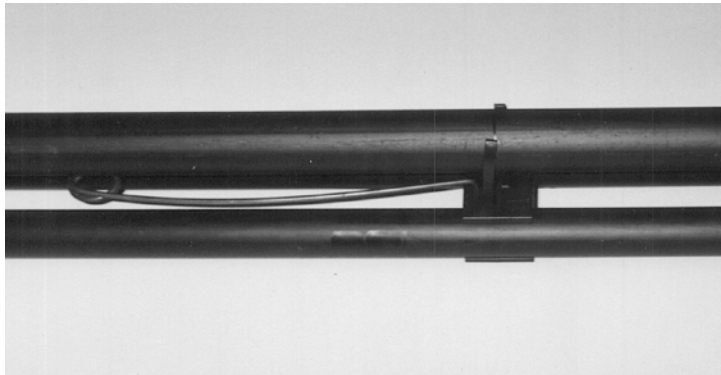


The **GeoClip[®]** easily snaps onto the u-bend and tremie pipes locking the assembly into the smallest configuration possible for ease in borehole insertion.

GeoClips are fastened to the u-bend assembly at 10' intervals and can be attached either before or during u-bend insertion.

Once the u-bend and tremie assembly is inserted to its desired depth, grout is pumped through the tremie pipe.

During the grouting procedure, the tremie pipe is pulled out of the borehole which then releases the spring activated **GeoClips**.

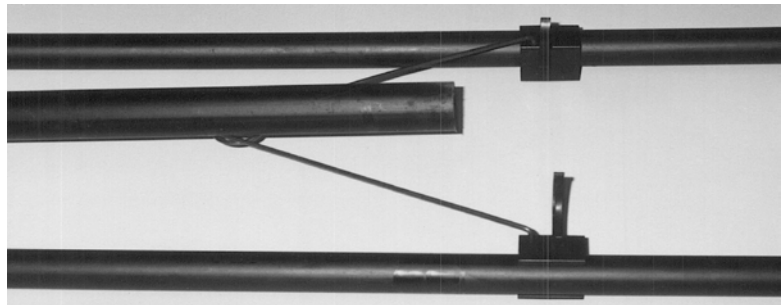

The **GeoClip** pushes the u-bend pipes to the borehole wall positioning the pipes directly across from one another.

Notice: Information contained in this document is subject to change without notice. This document reports accurate and reliable information to the best of our knowledge but our suggestions and recommendations cannot be guaranteed because the conditions of use are beyond our control. The user of such information assumes all risk connected with the use therefore. GHP Systems, Inc. assumes no responsibility for the use of information presented herein and hereby disclaims all liability in regard to such use. GHP Systems, Inc. reserves the right to upgrade the design/specifications of the GeoClips[®] without notice.